


# Range AFC/AF

**Use:** hot and cold sanitary water circuits, pressurizing systems, heating systems and refrigeration circuits

## Features

- Interchangeable membrane pressure tank for hot and cold sanitary water circuits, pressurizing systems, heating systems and refrigeration circuits
- Interchangeable rubber membrane produced according to the DIN 4807 regulation
- 100% made in Italy
- Produced according to the standards established by PED 2014/68/UE and EN 13831 regulations
- Homologations: WRAS, ACS
- High level of customization
- Epoxy powder exterior painting to guarantee a high level of protection against oxidation and a fine aesthetic final quality
- Accurate and extensive first-rate quality controls during all manufacturing process' phases

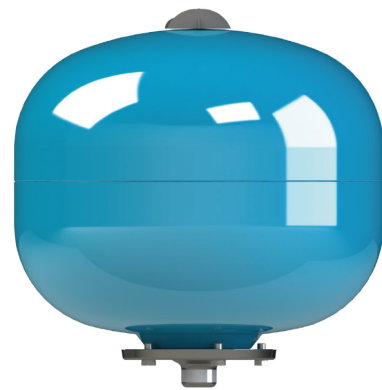

Code	Model	Capacity	Diameter	Height	Water entry connection	Standard pre-loading pressure	Maximum working pressure	Working temperature	External finishing colour
		Liters	Ø mm	H mm	G		Bar	°C	
510310	AFC 3	3	170	245	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
510510	AFC 5	5	170	275	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
510810	AFC CE 8	8	220	305	M 3/4" Gas	1,5	8,0	-10 + 70	Blue

511210	AFC CE 12	12	260	315	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
511612	AFC CE 16	16	260	379	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
511812	AFC CE 18	18	260	420	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
512412	AFC CE 24	24	260	517	M 1" Gas	1,5	8,0	-10 + 70	Blue
512412/01	AFC CE 24	24	260	517	M 3/4" Gas	1,5	8,0	-10 + 70	Blue
502412/001	AF CE 24	24	350	365	M 1" Gas	1,5	8,0	-10 + 70	Blue
502412/011	AF CE 24	24	350	365	M 3/4" Gas	1,5	8,0	-10 + 70	Blue