



LC 231




Emptying application




Further product documentation
net.grundfos.com/qr/i/99381576





Further product documentation
net.grundfos.com/qr/i/99480674

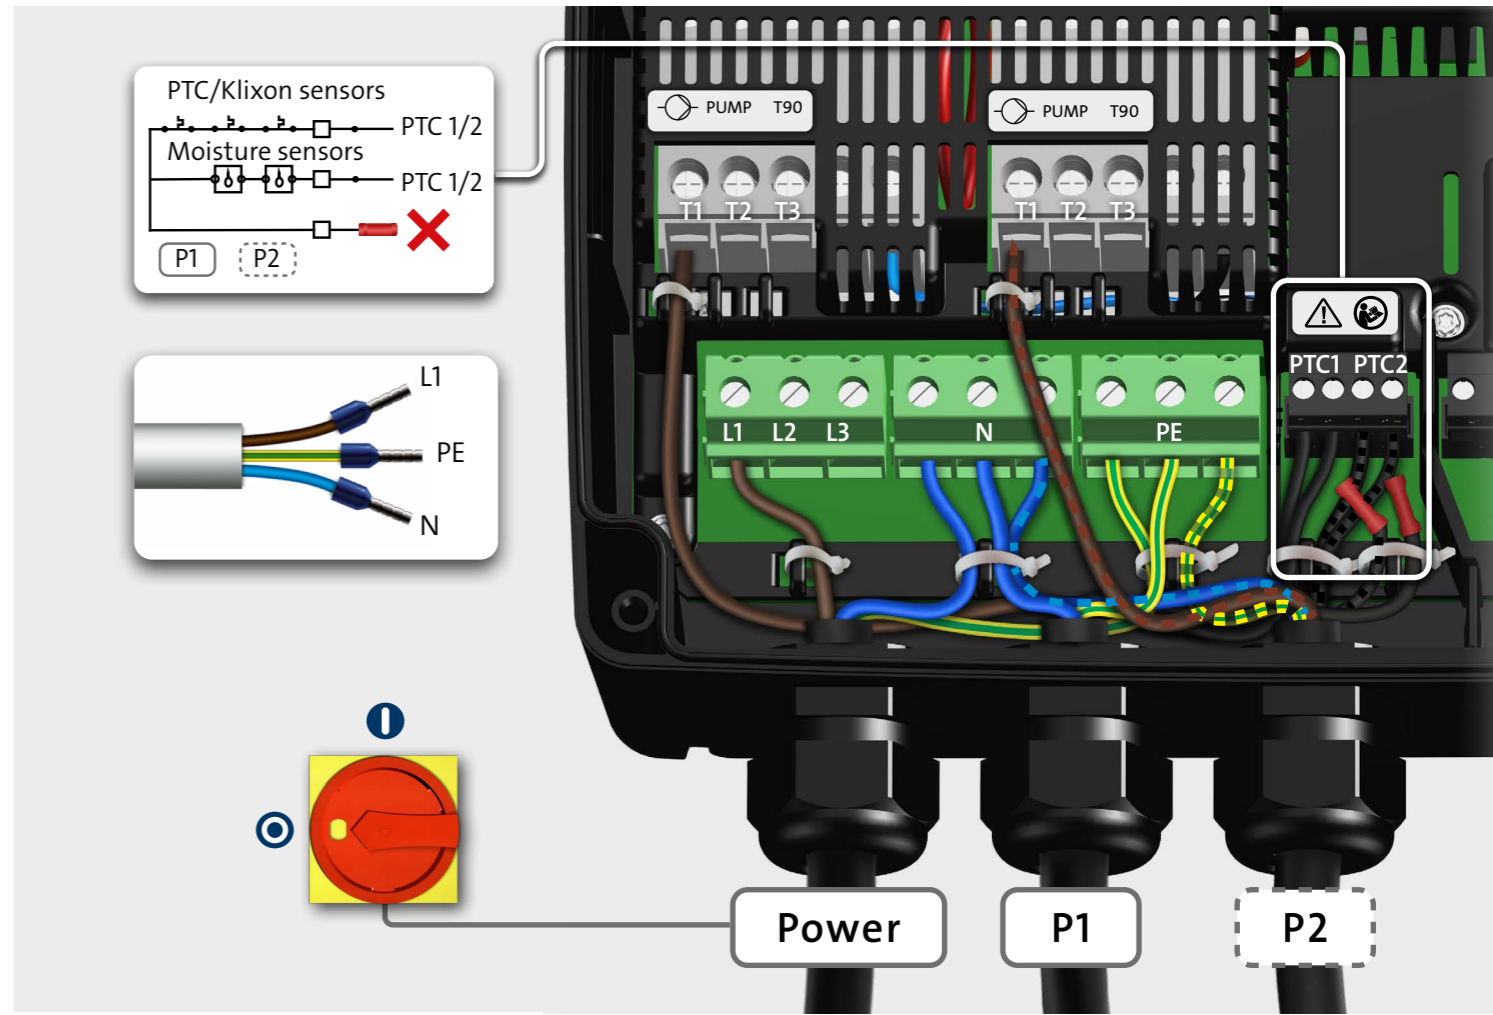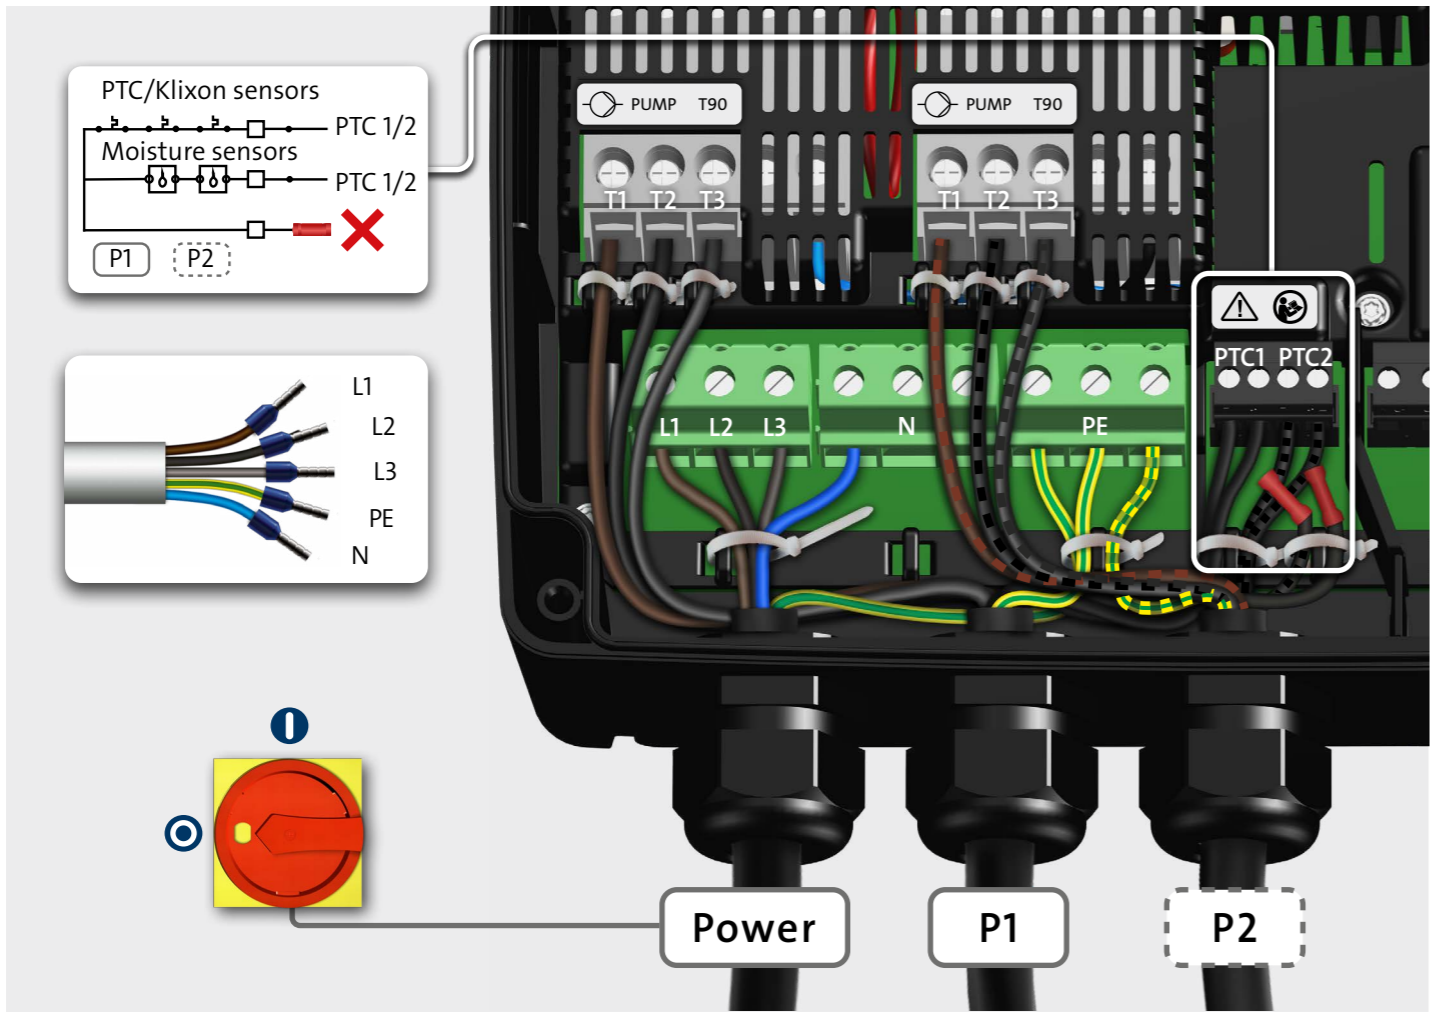

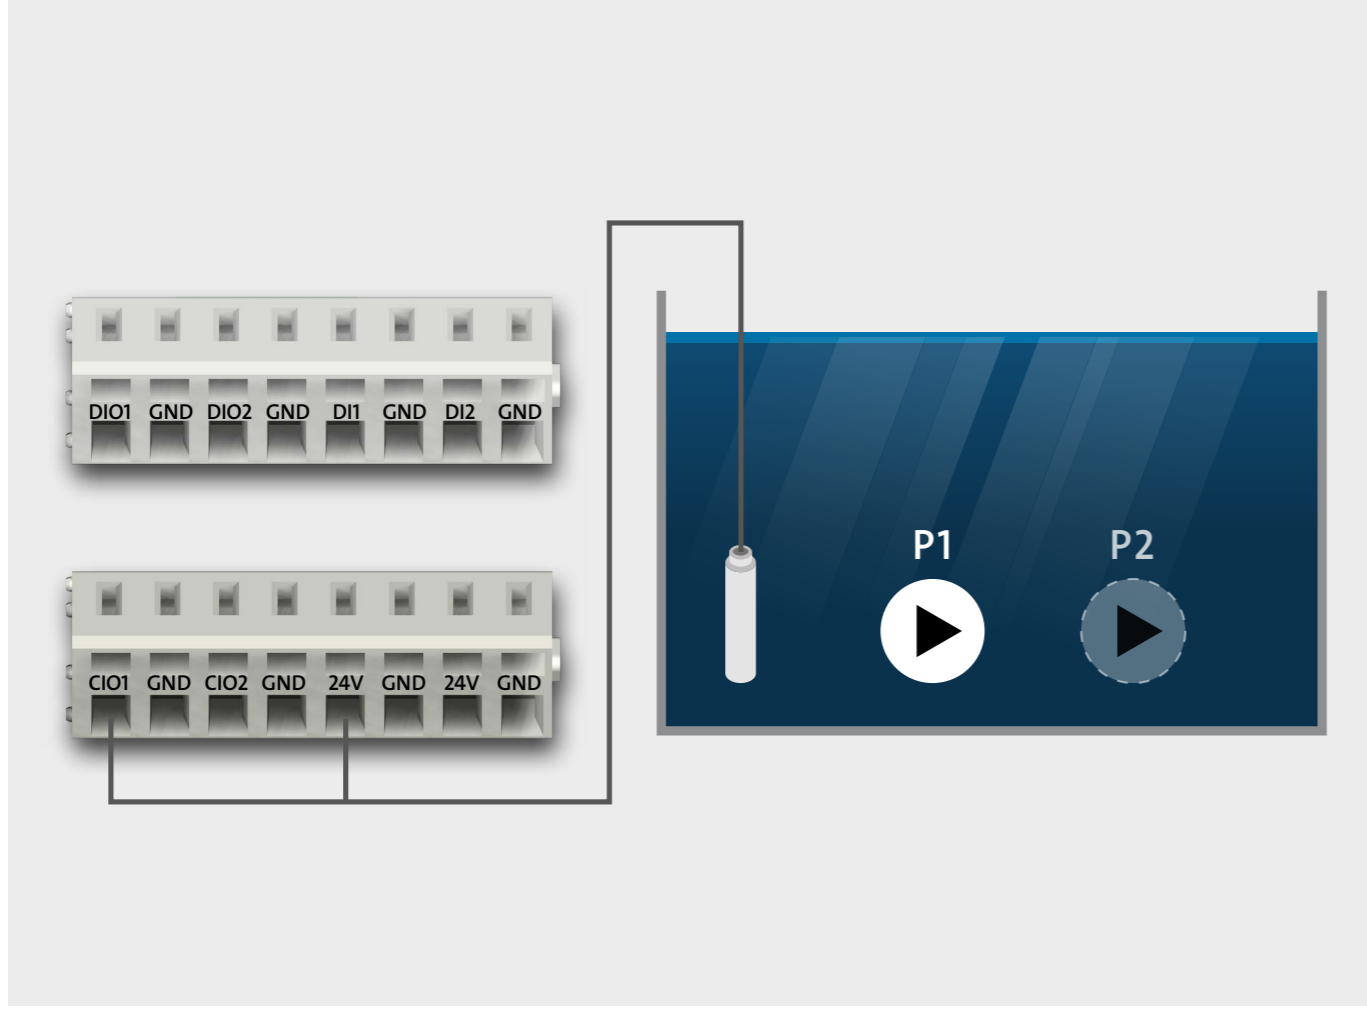

S-1 = analog

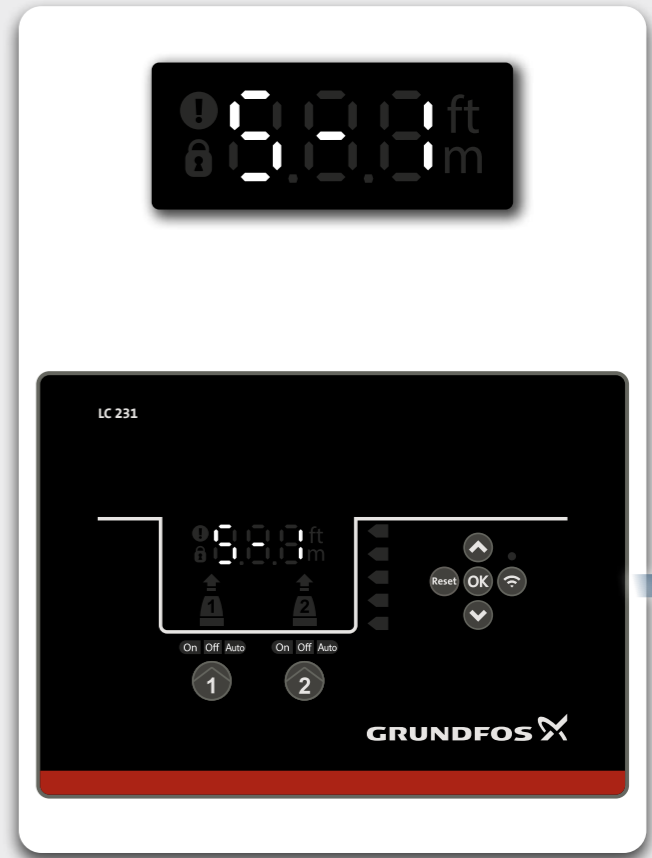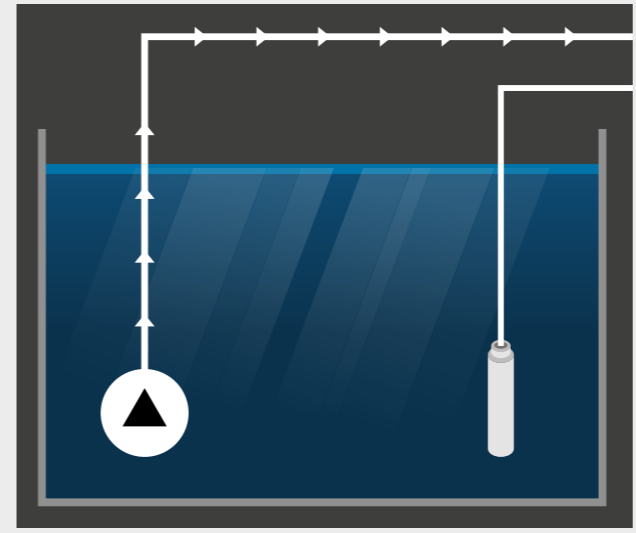



OK → ↑ ↓ → OK x 2

LC 231

Reset OK Wi-Fi

On Off Auto On Off Auto

1 2

GRUNDFOS

↑ ↓ → OK x 2

LC 231

Reset OK Wi-Fi

On Off Auto On Off Auto

1 2

GRUNDFOS

↑ ↓ → OK

LC 231

Reset OK Wi-Fi

On Off Auto On Off Auto

1 2

GRUNDFOS

↑ ↓ → OK

LC 231

Reset OK Wi-Fi

On Off Auto On Off Auto

1 2

GRUNDFOS




Diagram 1: Initial state of the Grundfos LC 231 control panel. The display shows 0.00m. A hand is shown pressing the up arrow, then the down arrow, and finally the OK button.

Diagram 2: Setting the first pump (1) to On. The display shows 1.00m. A hand is shown pressing the up arrow, then the down arrow, and finally the OK button. A legend shows '1' in a grey box and '2' in a green box.

Diagram 3: Setting the second pump (2) to On. The display shows 1.30m. A hand is shown pressing the up arrow, then the down arrow, and finally the OK button.

Diagram 4: Final state of the Grundfos LC 231 control panel. The display shows 1.00m. The mode is set to Auto. A hand is shown pressing the up arrow, then the down arrow, and finally the OK button. A legend shows '1' in a grey box and '2' in a green box. A 2-second timer icon is shown.



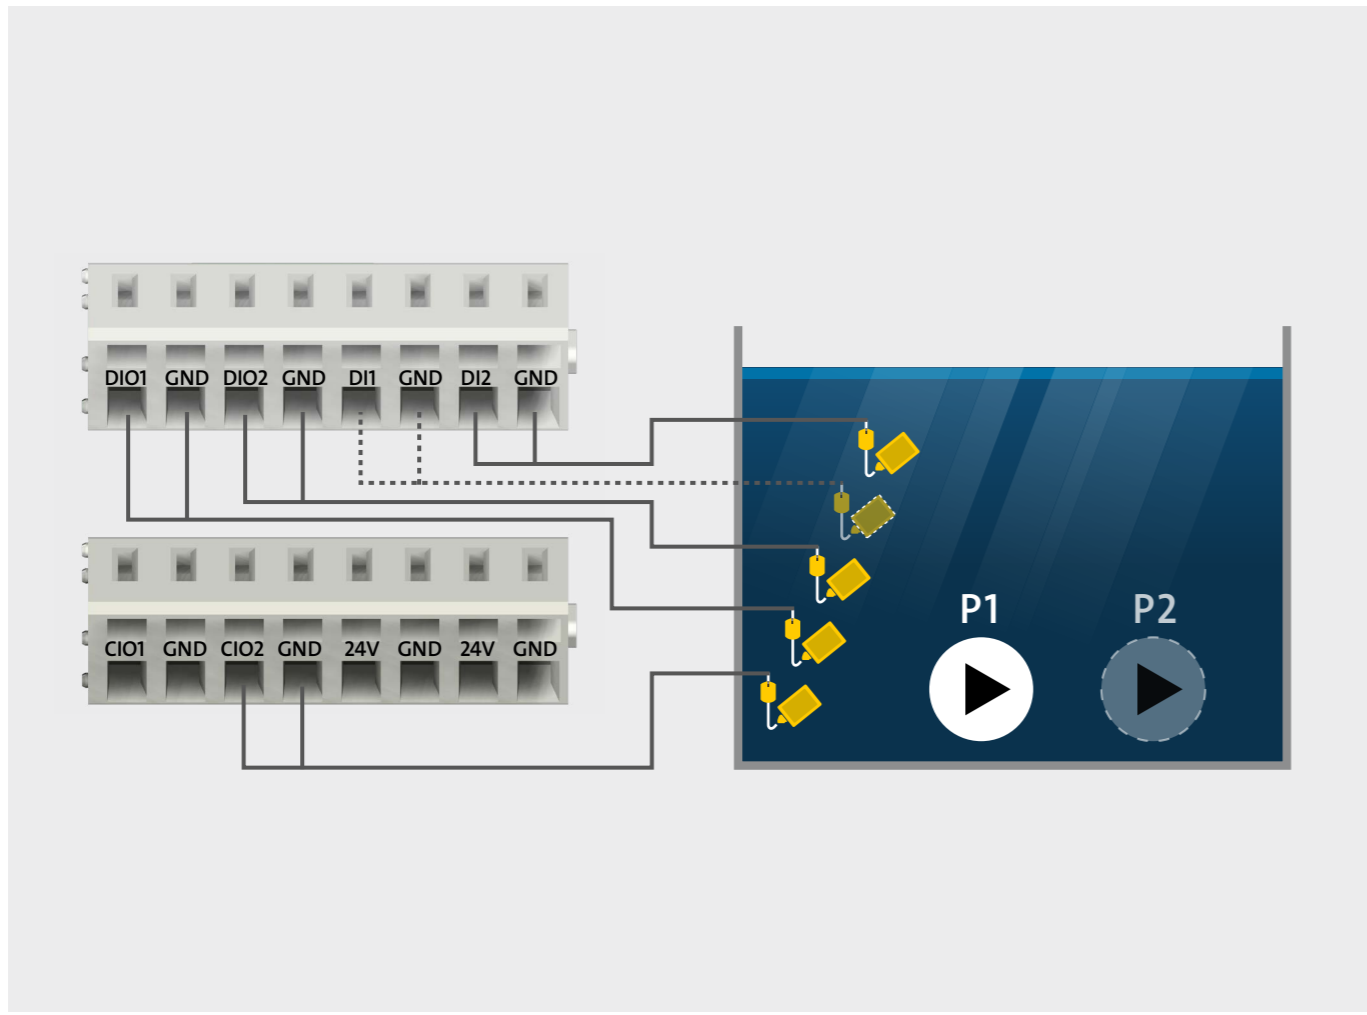

S-2 = digital

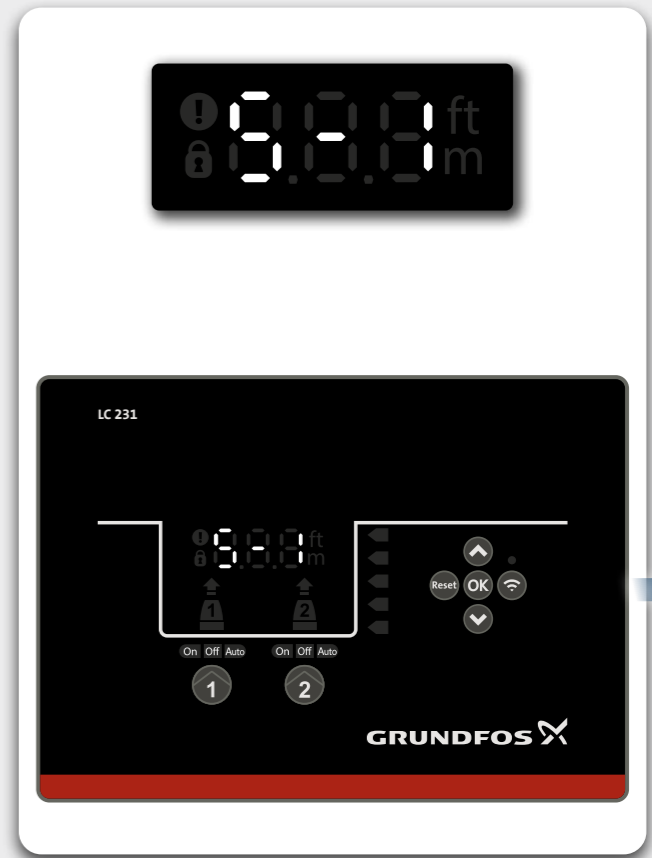
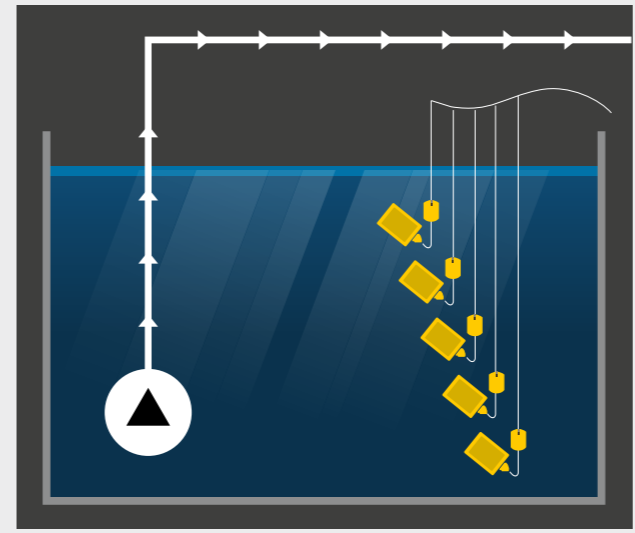




Diagram 1: Pressing the up arrow button followed by the OK button. The display shows 9.9 ft m.

Diagram 2: Pressing the up and down arrow buttons, then pressing the OK button twice. The display shows 1.0.

Diagram 3: Pressing the OK button, then the up and down arrow buttons, then pressing the OK button twice. The display shows 0.4.

Diagram 4: Pressing the left arrow button on the keypad, then the up and down arrow buttons, then pressing the OK button. The display shows 0.0.



Diagram illustrating the initial state of the Grundfos LC 231 control panel. The top part shows a simplified view of the screen with a red error icon and an 'OK' button. A hand icon indicates the user pressing 'OK'. Below this, the actual device screen is shown with the error icon and 'OK' button. The screen displays 'LC 231' and 'GRUNDFOS'. The mode selector is set to 'Auto' for both pumps. A legend at the top right shows pump 1 in grey and pump 2 in green.

Diagram illustrating the second step. The top part shows the screen with '0.00 ft' displayed and a red error icon. A hand icon indicates the user pressing 'OK'. Below this, the actual device screen is shown with '0.00 ft' and the error icon. The screen displays 'LC 231' and 'GRUNDFOS'. The mode selector is set to 'Auto' for both pumps.

Diagram illustrating the third step. The top part shows the screen with 'On Off Auto' displayed and a red error icon. A hand icon indicates the user pressing 'OK'. Below this, the actual device screen is shown with 'On Off Auto' and the error icon. The screen displays 'LC 231' and 'GRUNDFOS'. The mode selector is set to 'Auto' for both pumps. A legend at the top right shows pump 1 in grey and pump 2 in green. A '2 sec.' timer icon is shown next to the 'OK' button.



be think innovate

Installation date: _____

Installer:

99490947 08.2020

ECM: 1293623

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

Trademarks displayed in this material, including but not limited to Grundfos, the Grundfos logo and "be think innovate" are registered trademarks owned by The Grundfos Group. All rights reserved.
© 2020 Grundfos Holding A/S, all rights reserved.