

► Our technology. Your success.

Pumps • Valves • Service



Ama-Drainer[®]-Box Mini – Automatic Waste Water Lifting Unit



Applications:


Automatic disposal of waste water from washbasins, showers, sinks, dishwashers and washing machines

More information:

www.ksb.com/products

Ama-Drainer®-Box Mini – Automatic Waste Water Lifting Unit for Above-floor Installation

Material variant for aggressive fluids available (variant C)

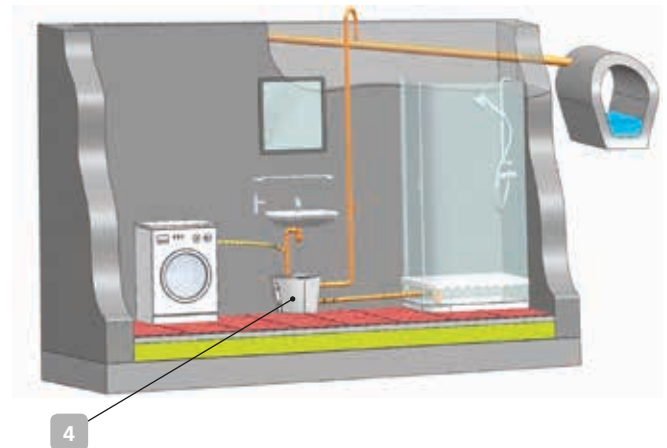

1 Fast installation and ease of handling

- Ready-to-connect waste water lifting unit: pre-installed pump saves time
- No accessories required

2 Attractive styling well-suited to visible installation

- Low-height triangle-shaped tank of modern design with wall mounting option
- Space-saving, stable solution and low vibration level

3 No bad odours

- New type of moisture-resistant activated carbon filter: long life, excellent odour absorption, compliance with hygiene requirements
- Integrated overflow protection

4 Flexible use

- Large variety of connection options: DN 32, DN 40 and DN 50 connection diameters with self-sealing rubber sockets
- 2 inlet levels can be selected, e.g. for washing machine, dishwasher, shower, etc.
- Discharge line can be connected either on the left or on the right.
- One float can be set for 2 switching levels.
- Shower connection as a standard

5 Reliable and easy-to-service

- Powerful, maintenance-free submersible motor pump type Ama-Drainer N 301
- High availability

Fluids handled

Standard design – Particle size 10 mm
Slightly contaminated water

Variant C – Particle size 10 mm
Aggressive fluids

Ama-Drainer-Box Mini is not suitable for sewage from urinals and toilets. For these applications, please use our mini-Compacta sewage lifting units.

Technical data

Flow rate	Up to 10 m ³ /h (2,8 l/s)
Head	Up to 6.5 m
Fluid temperature	Up to 50 °C
Effective volume	10 l



KSB Aktiengesellschaft
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com